


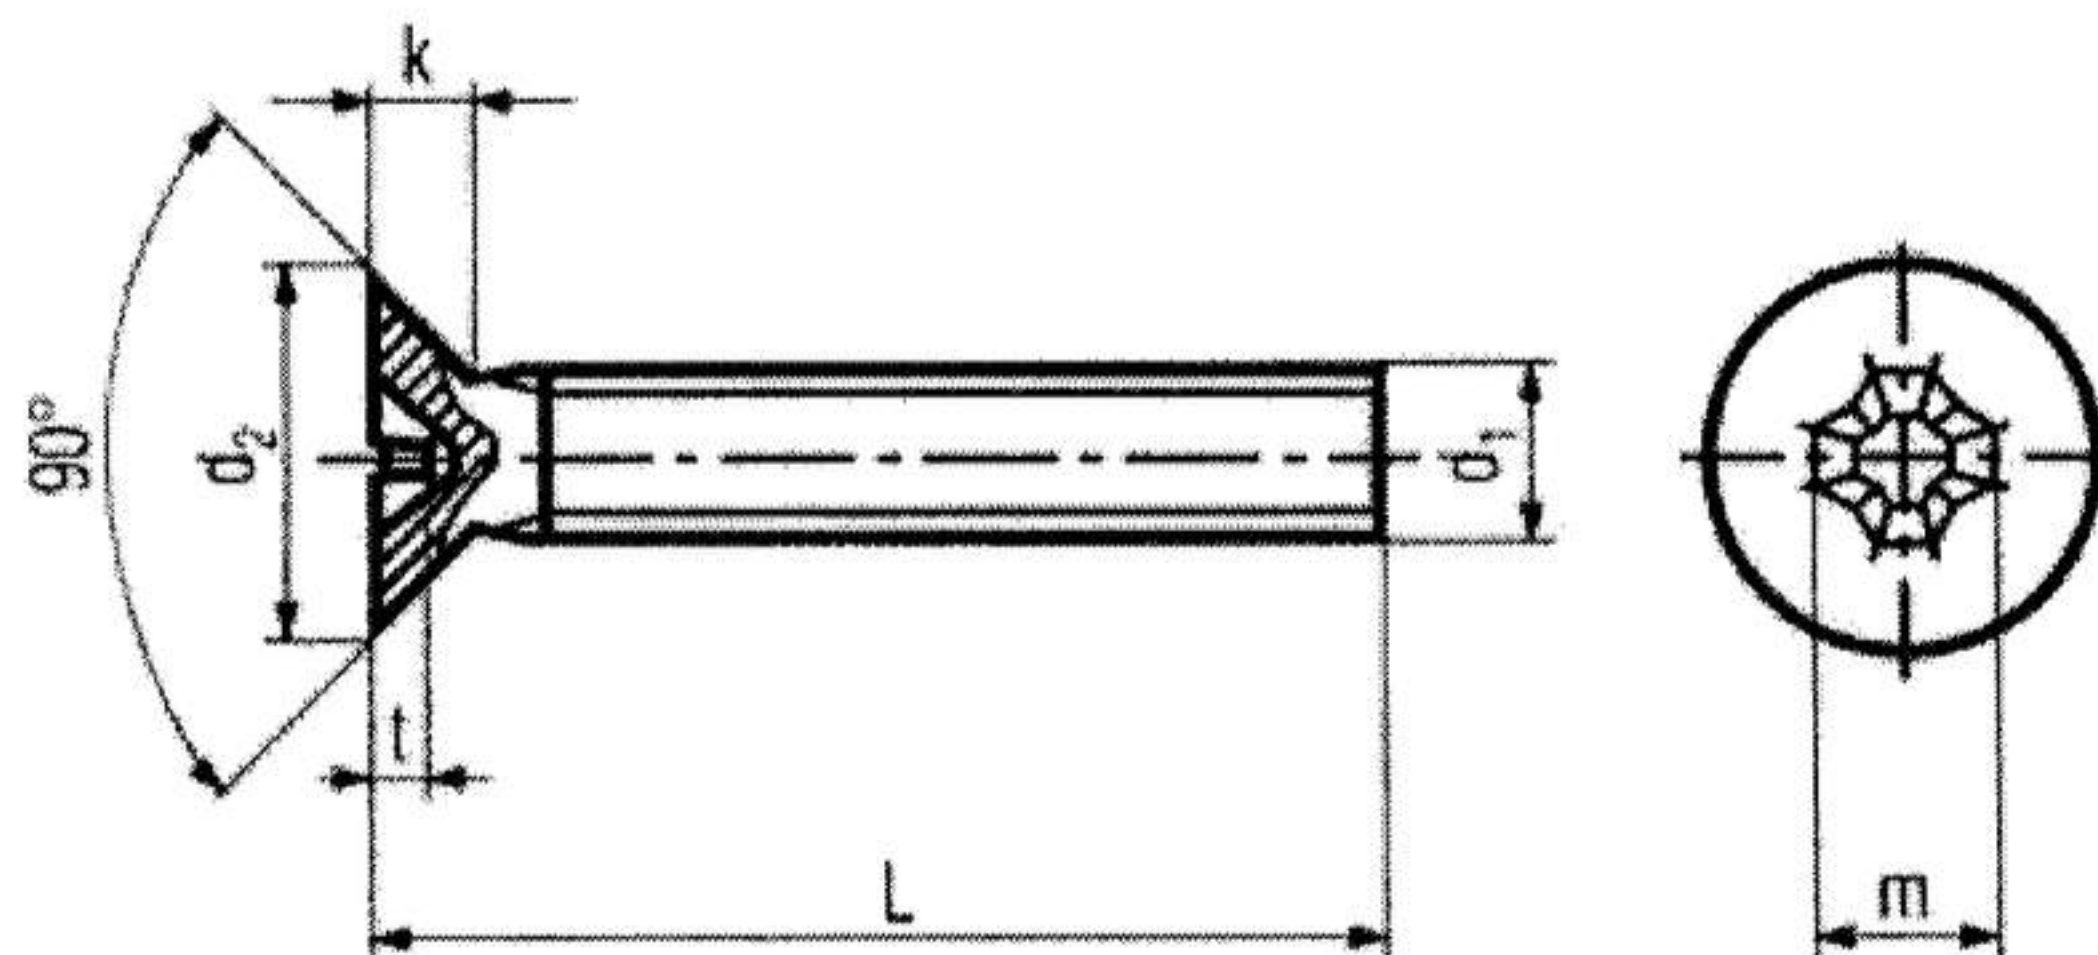

DIN 965

d_1	d_2	k max.	Phillips	m примерно	t	
					min.	max.
M2	3.8	1.2	1	2.35	0.95	1.25
M2.5	4.7	1.5	1	2.7	1.25	1.55
M3	5.6	1.65	1	2.9	1.5	1.8
M3.5	6.5	1.93	2	3.9	1.4	1.9
M4	7.5	2.2	2	4.4	1.9	2.4
M5	9.2	2.5	2	4.6	2.1	2.6
M6	11	3	3	6.6	2.8	3.3
M8	14.5	4	4	8.7	3.9	4.4