


DIN 7985

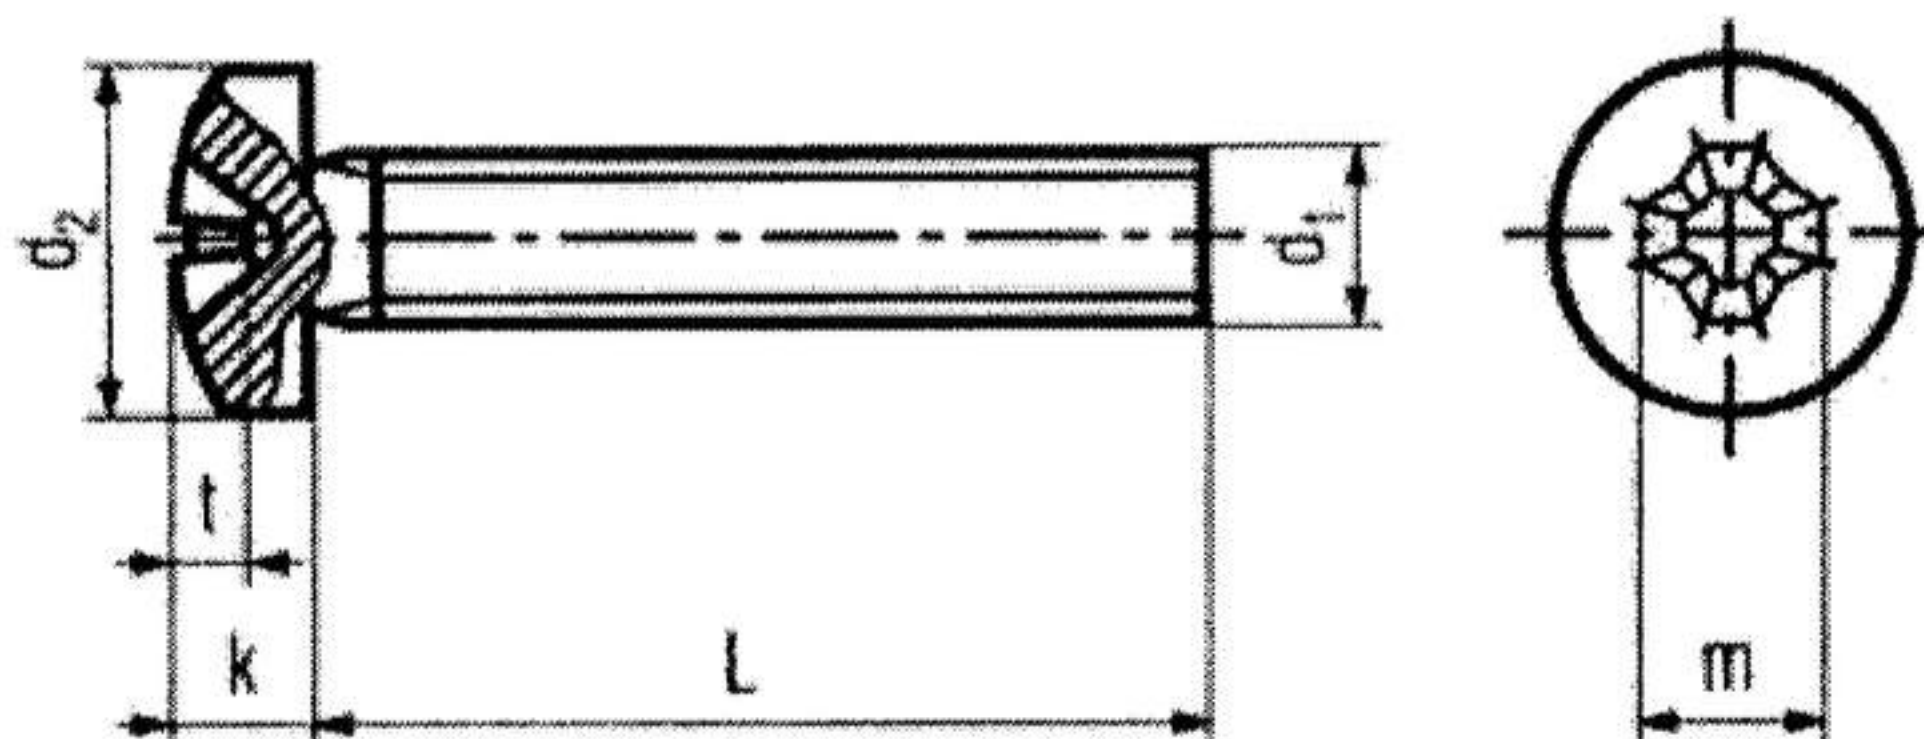

d_1	d_2 max.	k max.	Phillips	m примерно	t min.	t max.
M1.6	3.2	1.42	0	1.8	0.72	1.02
M2	4	1.72	1	2.5	1.1	1.4
M2.5	5	2.12	1	2.7	1.3	1.6
M3	6	2.52	1	3.1	1.7	2
M3.5	7	2.82	2	4.2	1.74	2.24
M4	8	3.25	2	4.6	2.04	2.54
M5	10	3.95	2	5.3	2.77	3.27
M6	12	4.75	3	6.8	3.03	3.53
M8	16	6.15	4	9	4.18	4.68
M10	20	7.68	4	10.2	5.38	5.88